STATUS®

STATUS ITALIA S.R.L.
Via Aldo Moro, Nr. 14/A
IT36060 - Pianezze
Zona industriale, (VI), ITALY
e-mail: office@status-tools.eu
sales@status-tools.com

www.status-tools.com

STATUS®

POLISHING & REFINISHING TOOLS

2026

STATUS polishing machines are divided into two types:

Simple rotational action (PA)

Machines in which the support circle rotates around the central axis of the drive shaft. This type of movement is characterized by a high penetrating effect and, if used carelessly, can cause overheating of the surface, as well as create a hologram effect.

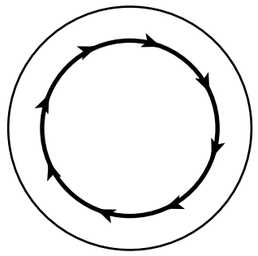

Removal rate

Scratch removal efficiency

Removing of holograms

Creation of holograms

Orbital Rotational action (XPA)

The central axis of the support circle rotates around the axis of the drive shaft in an orbit. The circle moves randomly around its axis, with variable speed and direction, determined by centrifugal forces and friction on the working surface. When the rotation stops, it creates only an orbital (oscillatory) effect. This type of movement is the best compromise in terms of efficiency and surface finish.

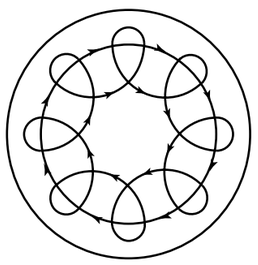

Removal rate

Scratch removal efficiency

Removing of holograms

Creation of holograms

Cordless multi polisher

CXP12-50Li

Compact battery

Charge level indicator

Ergonomic rubberized handle

Soft start

Constant speed

3 modes:
- Random orbital rotation **12 mm**
- Random orbital rotation **3 mm**
- Simple rotation

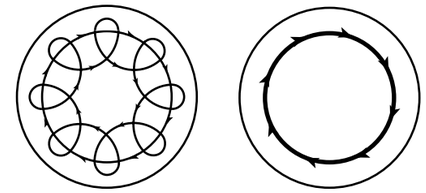

Variable speed adjustment

Lock-on switch

Voltage	12 V DC
No load speed	2000-5500/min.
Pad size	38, 50 mm
Orbit	0/3/12 mm
Thread	M6x1
Battery	Li-Ion, 12 V, 2 Ah
Weight	1 kg
Code	0 33 911 01

- Battery Li-Ion 12 V, 2 Ah - 2 pcs.
- Charger
- Backing pad (38 mm)
- Backing pad (50 mm)
- Counterweight 12 mm
- Counterweight 3 mm
- Extension rod
- Polishing pad (sponge) - 20 pcs.
- Polishing pad (faux wool) - 12 pcs.
- Polishing pad (brush) - 2 pcs.
- Wrench
- Fabric case

HD PROFESSIONAL 2 Ah

Cordless random orbital polisher/sander

CXP75Li

Orbital action and a powerful ***brushless motor*** work together to deliver quiet, low-vibration operation, even during extended use.

Soft start, constant speed control, and precise trigger-activated ***speed adjustment*** enable comfortable one-handed use, giving you full command over the tool. The 5-position speed limiter lets you set the maximum RPM in advance, preventing accidental over-speeding.

The kit includes ***interchangeable pads*** for maximum versatility – from automotive polishing to detailing tight spots and small curved surfaces.

The machine comes in a durable ***carrying case*** with a comprehensive set of polishing attachments, so you're ready to work right out of the box.

Voltage	12 V DC
No load speed	5000-9000/min.
Pad size	Ø30/50/75 mm
Orbit	5 mm
Thread	M6x1
Battery	Li-Ion, 12 V, 2 Ah
Weight	0,65 kg
Code	0 33 917 01

- Battery 12 V 2Ah, 2 pcs.
- Charger
- Sponge set
- Sandpaper set
- Backing pad 30 mm
- Backing pad 50 mm
- Backing pad 75 mm
- Wrench
- Plastic case

BRUSHLESS

HD PROFESSIONAL

Cordless rotary polisher

PA150L

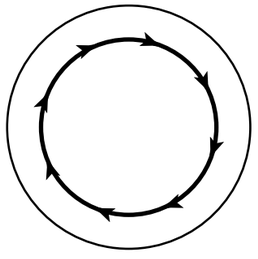

- Electronic speed control
- Deattachable ventilation slots

- Lock-on switch
- Overload indicator

- Brushless motor
- Soft start
- Constant speed
- Spindle lock butoon
- Aluminum gear housing
- Velcro polishing attachment
- Rubberized handle
- Status UniOne battery system

Voltage	20 V DC
No load speed	500-3500/min.
Pad size	Ø150 mm
Spindle thread	M14
Battery	Li-Ion, 20 V, 4 Ah
Weight	2,3 kg
Code	0 33 915 01

BRUSHLESS

HD PROFESSIONAL

- D-handle
- Backing pad (150 mm)
- Sheepskin attachment
- Battery Li-Ion 4 Ah
- Charger
- Wrench
- Plastic case

Rotary polisher

PA125CE

5 meters

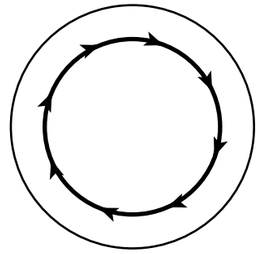

75 mm 125 mm

Voltage	220-240 V~
Input power	750 W
No load speed	**800-2500/min.**
Pad size	75 & 125 mm
Spindle thread	M14
Weight	2 kg
Cable length	5 m
Code	0 33 907 01

HD PROFESSIONAL



- T-shape handle
- D-shape handle
- Backing pad (75 mm)
- Backing pad (125 mm)

Rotary polisher

PA150CE

5 meters



150 mm 180 mm

Voltage	220-240 V~
Input power	1200 W
No load speed	**450-1700/min.**
Pad size	150 & 180 mm
Spindle thread	M14
Weight	2,6 kg
Cable length	5 m
Code	0 33 906 01

HD PROFESSIONAL

- T-shape handle
- D-shape handle
- Backing pad (150 mm)
- Backing pad (180 mm)

Rotary polisher

PA180CE

5 meters



Voltage	220-240 V~
Input power	1500 W
No load speed	**600-3000/min.**
Pad size	180 mm
Spindle thread	M14
Weight	3 kg
Cable length	5 m
Code	0 33 909 01

HD PROFESSIONAL

SOFT START · Aluminum · SOFT GRIP · ELECTRONIC · CONSTANT ELECTRONIC

- T-shape handle
- D-shape handle
- Backing pad (180 mm)
- Polishing pad (faux wool)
- Sandpaper
- Wrench

Random orbital polisher

XPA12-75

NEW

Random orbital rotation **12 mm**

5 meters



50 mm 75 mm

Voltage	220-240 V~
Input power	750 W
No load speed	2000-5500/min.
Pad size	50, 75 mm
Orbit	12 mm
Thread	5/16 -2 4T
Weight	2,3 kg
Code	0 33 910 01

HD PROFESSIONAL

- T-shape handle
- D-shape handle
- Backing pad (50 mm)
- Backing pad (75 mm)
- polishing pads (sponge)

Random orbital polisher

XPA9-125E

Random orbital rotation **9 mm**

5 meters



75 mm 125 mm

PROFESSIONAL

Voltage	220-240 V~
Input power	700 W
No load speed	2000-6400/min.
Pad size	75 & 125 mm
Orbit	9 mm
Thread	5/16 -2 4T
Weight	2,5 kg
Code	0 33 912 01

- Backing pad 125 mm
- Backing pad 75 mm
- T-shape handle
- D-shape handle
- Polishing pad (sponge)
- Wrench

Random orbital polisher

XPA12-125CE

5 meters



Voltage	220-240 V~
Input power	750 W
No load speed	2000-5500/min.
Pad size	125 mm
Orbit	12 mm
Weight	2,7 kg
Code	0 33 913 01

HD PROFESSIONAL

SOFT START · Aluminium · SOFT GRIP · ELECTRONIC · CONSTANT ELECTRONIC

- Backing pad (125 mm)
- T-shape handle
- D-shape handle
- Polishing pad (sponge)
- Wrench

Random orbital polisher

XPA15-150CE

Random orbital rotation **15 mm**

5 meters

125 mm 150 mm



Voltage	220-240 V~
Input power	900 W
No load speed	2000-4200/min.
Pad size	**125, 150 mm**
Orbit	15 mm
Weight	2,6 kg
Code	0 33 904 01

- T-shape handle
- D-shape handle
- Backing pad (125 mm)
- Backing pad (150 mm)
- Wrench

Random orbital polisher

XPA21-150CE
XPA15-125CE

Random orbital rotation **15 mm (XPA15-125CE)**

Random orbital rotation **21 mm (XPA21-150CE)**

5 meters



	XPA15-125CE	XPA21-150CE
Voltage	220-240 V~	220-240 V~
Input power	1000 W	1000 W
No load speed	2000-4800/min.	2000-4800/min.
Pad size	**125 mm**	**150 mm**
Orbit	15 mm	21 mm
Weight	3 kg	3 kg
Code	0 33 914 01	0 33 908 01

HD PROFESSIONAL

- T-shape handle
- D-shape handle
- Backing pad

Random orbital sander

XS5-150BL

3 meters

- LCD display of rotation speed
- Brushless motor
- Electronic speed control
- Soft start
- Constant speed
- Velcro fastening of sanding paper
- Ergonomic rubberized handle
- Dust removal system with the ability to connect a vacuum cleaner
- Fabric dust container

Voltage	220-240 V~
Input power	500 W
No load speed	4000-8000/min.
Orbit	5 mm
Pad size	Ø150 mm
Weight	2 kg
Code	0 33 916 01

BRUSHLESS

HD PROFESSIONAL



- Dust collector container
- Vacuum cleaner adapter
- Wrench
- Plastic case

Random orbital sander

XS5-150ET

5 meters

- Electronic speed control
- Soft start
- Constant speed
- Velcro fastening of sanding paper
- Ergonomic rubberized handle
- Dust removal system with the ability to connect a vacuum cleaner
- Fabric dust container

Voltage	220-240 V~
Input power	500 W
No load speed	5000-10000/min.
Orbit	5 mm
Pad size	Ø125, 150 mm
Weight	1,7 kg
Code	0 36 109 01

HD PROFESSIONAL



- Dust collector container
- Wrench
- Backing pad (125 mm)
- Backing pad (150 mm)