STATUS®

Power tools 2026

CLASSIFICATION

PROFESSIONAL

The dominant line in STATUS power tools range. High efficiency and quality power tools, gearbox housings are made of aluminum or magnesium alloys. Switches and other components possess increased durability. Recommended for construction operations and as a professional tool.

HD PROFESSIONAL

Highly durable and reliable tools built for continuous operation. Recommended for usage by professionals during construction works in severe industry environment.

CONTENTS

5 Cordless tools
26 Drills
27 Rotary hammers
30 Angle grinders
34 Sanders
37 Jig saws
38 Routers

SYMBOLS

Two stage reducing gear

Aluminum alloy gear housing

Professional cable with the neoprene coating, min. 3 m. long

Constant electronics

Two speed gearbox

Magnesium alloy gear housing

Supplied with carrying case

Spindle lock function

Drilling

Safety clutch

Adjustable pendulum cutting action

Tool-less wheel guard adjustment function

Drilling
Drilling with impact

SDS-plus accessory mounting system

Rubber soft grip handle

3-position front handle

Drilling
Drilling with impact
Impact

SDS-max accessory mounting system

Keyless chuck

Rotatable rear handle

Reverse function

30 mm hexagonal accessory mounting system

Keyless metal chuck

Double insulation

Electronic speed adjustment

Built-in dust removal system

Supplied with two 2 battery packs

Tool-free chaintension function

Soft start

Cutting line laser marker

Charge time - 1 hour

LED working area illumination

Brushless tools system
UniOne 20V

BRUSHLESS

BLDC motor

All **UniOne** system tools are equipped with a brushless motor. The operating principle of a brushless BLDC motor (brushless direct current motor) is to rotate the rotor in an alternating magnetic field, which is created by alternating magnetization of the stator elements. This process is controlled by high-precision electronics. The advantages of the system include:

Energy efficiency
The BLDC motor provides an efficiency gain of more than 30% compared to a brushed motor. This is achieved due to more accurate and efficient operation of the electronics, since the controlled element is the stator electromagnets, not the brushes.

Life time
Since there is no brush wear, no sparking, and no heating of the commutator, a BLDC motor is tens of times more durable than a brush motor.

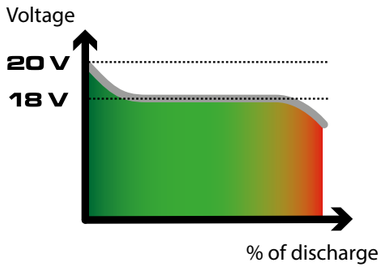

UniOne Li-Ion 20 V

The voltage characteristic of 20 V is the peak value of a fully charged battery.

The nominal (operating) voltage of the **UniOne** battery is 18 V.

Batteries

Model	ABCTW20-2Li	ABCTW24Li	ABCTW24-2Li
Voltage	20 V	20 V	20 V
Type	Li-Ion	Li-Ion	Li-Ion
Capacity	2 Ah	4 Ah	8 Ah
Code	0 77 223 01	0 77 222 01	0 77 229 01

Chargers

Model	CBCTW24Li	CBCTW24Li-1
Code	0 76 121 01	0 76 129 01

Cordless drill-driver

CBL20-2Li

Features

- Brushless motor
- All-metal keyless chuck 13 mm
- Compact design allows use in confined spaces
- Automatic spindle lock
- Two speed transmission
- Clutch torque adjustment
- Built-in illumination of the work area
- Reverse
- Speed control
- Ergonomic rubber grip over
- Belt clip
- Protective strip
- 2 Ah Li-Ion slider battery with charge level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	0-400/0-1400/min.
Chuck/holder	Keyless, 13 mm
Torque (hard/soft)	50/32 Nm
Torque adjustment steps	20 + 1
Battery	Li-Ion, 20 V
Weight	1,3 kg
Code	0 71 261 01

Set

- Li-Ion Battery 2 Ah, 2 pcs.
- Charger
- Plastic carry case
- Belt clip

Cordless drill-driver

CBL21Li

Features

- Brushless motor
- All-metal keyless chuck 13 mm
- Compact design allows use in confined spaces
- Automatic spindle lock
- Two speed transmission
- Clutch torque adjustment
- Built-in illumination of the work area
- Reverse
- Speed control
- Ergonomic rubber grip over
- Li-Ion slider battery with charge level indicator
- Belt clip
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	0-460/0-1900/min.
Chuck/holder	Keyless, 13 mm
Torque (max.)	60 Nm
Torque adjustment steps	20 + 1
Battery	Li-Ion, 20 V
Weight	0,95 kg
Code	0 71 266 01

Set

- Li-Ion Battery 2 Ah, 1 pcs.
- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Plastic carry case
- Belt clip

BRUSHLESS

20v Lithium-Ion UNi ONE

HD PROFESSIONAL

Cordless impact wrench

CBL21HLi

Features

- Brushless motor
- High torque
- Impact function for working with large diameter fasteners
- Reversible function
- Aluminium alloy transmission housing
- Two maximum speed modes
- Built-in illumination of the work area
- 1/2" square bore drive for use with impact sockets and friction ring
- 1/4" hex holder for using bits
- Ergonomic rubber grip over
- 4 Ah Li-Ion slider battery with charge level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	1800/2700/min.
Impact rate	2100/2400/min.
Torque (max.)	350 Nm
Battery	Li-Ion, 20 V
Chuck/holder	square 1/2" ; hex 1/4"
Weight	1,75 kg
Code	0 74 122 01

Set

- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Plastic carry case
- Head
- Bits
- Belt clip

BRUSHLESS

20v Lithium-Ion UNi ONE

HD PROFESSIONAL



Cordless rotary hammer SDS+

MPB20

Features

- Brushless motor
- 3-position operating mode switch
- SDS+ accessory mounting system
- Reverse
- Built-in illumination of the work area
- Auxiliary handle
- Ergonomic rubber grip over
- 4 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	0-1400/min.
Impact rate(max.)	4500/min.
Impact energy	1,7 J
Battery	Li-Ion, 20 V
Weight	2,65 kg
Code	0 14 101 01

Set

- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Plastic carry case
- Auxilliary handle
- Depth gauge

BRUSHLESS

20v Lithium-Ion UNI ONE

HD PROFESSIONAL

Cordless trimmer

RH750BL

Features

- Brushless motor
- Safety switch with lock-on feature
- Soft start
- Electronic speed control
- Constant speed under load
- Spindle lock for quick bit changes
- Routing depth adjustment
- Removable cast aluminum base
- Usable with plunge or tilt base
- Rip fence and roller fence included
- Dust extraction port included
- 4 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
Height	226 mm
No load speed	10000-30000/min.
Cutter Shank Diameter	Ø6, Ø8 mm
Battery	Li-Ion, 20 V
Weight	2 kg
Code	0 51 511 01

Set

- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Rip fence
- Roller fence
- Dust extraction port
- 6 mm collet
- 8 mm collet
- Wrench
- Plastic carry case

BRUSHLESS

20v Lithium-Ion UNI ONE

PROFESSIONAL

Cordless jig saw

JS800BL

Features

- Brushless motor
- Quick saw blade change system
- Electronic dual stroke rate control
- Four-position pendulum mode switch
- Cutting area airflow with switch-off option
- Cast aluminum soleplate
- Switch lock-on position
- Non-slip rubberized handle
- Plastic soleplate
- 2 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	800-3500/min.
Max. cutting capacity	
- wood	100 mm
- metal	10 mm
Stroke length	23 mm
Battery	Li-Ion, 20 V
Weight	1,9 kg
Code	0 74 121 02

Set
- Li-Ion Battery 2 Ah, 1 pcs.
- Charger
- Parallel fence
- Wrench
- Vacuum cleaner connection
- Plastic soleplate
- Anti-splinter plate
- Plastic carry case

Cordless rceiprocating saw

RS800BL

Features

- Long-lasting brushless motor
- Quick saw blade change systems
- Rubber-coated front and rear handles
- Pendulum mode switch
- Front stop adjustable in steps
- On/off switch with a safety lock to prevent accidental operation
- Dual stroke frequency adjustable by pressing the switch button
- Hanging storage bracket
- 4 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	0-3000/min.
Stroke length	29 mm
Max. cutting capacity	
- wood	200 mm
- metal	60 mm
Battery	Li-Ion, 20 V
Weight	2,7 kg
Code	0 74 120 02

Set
- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Saw blade

Cordless grass trimmer

DB20CB-20 Kit

Features

- Brushless motor
- Two speed settings: for line and for blade
- Under-mounted motor (no flexible drive)
- Battery level indicator
- Shock-resistant protective shield
- Safety strap
- Folding design
- Adjustable intermediate handle
- 4 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	
- line	5500/min.
- blade	7500/min.
Cutting width	
- line	330 mm
- blade	250 mm
Line thickness	1,6 mm
Battery	Li-Ion, 20 V
Weight	3,8 kg
Code	0 74 112 02

Set
- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Spool of line
- Knife
- Screws
- Wrench
- Belt

Cordless chain saw

SCB300-20 Kit

Features

- Brushless motor
- Accidental start protection
- Safety guard with instant brake activation
- Automatic chain lubrication
- Tool-free chain tensioning
- Ergonomic rubberized handle provides a perfect grip
- 4 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
Rotation Speed	3500/min.
Chain Speed (Max.)	10 m/s²
Bar Length	300 mm (12")
Chain Pitch	3/8"
Number of Chain Links	45
Groove Width	1,3 mm
Battery	Li-Ion, 20 V
Weight	4 kg
Code	0 74 108 02

Set
- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Bar
- Chain
- Safety hood

Cordless chain saw

SCB251-20 Kit

Features

- Brushless motor
- Accidental start protection
- Safety guard with instant brake activation
- Automatic chain lubrication
- Tool-free chain tensioning
- Ergonomic rubberized handle provides a perfect grip
- 4 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
Rotation Speed	2600/min.
Chain Speed (Max.)	7 m/s
Bar Length	250 mm (10")
Chain Pitch	3/8"
Number of Chain Links	40
Groove Width	1,1 mm
Battery	Li-Ion, 20 V
Weight	2,1 kg
Code	0 74 123 02

Set
- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Bar
- Chain
- Safety hood

BRUSHLESS

20v Lithium-Ion UNi ONE

GARDEN

Cordless chain saw

SCB201-20

(only body without battery and charger)

Features

- Brushless motor
- Keyless chain tension adjustment
- Safety hilt on the front handle
- Automatic chain lubrication
- Accidental start protection
- Ergonomic rubberized handle
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
Rotation Speed	4600/min.
Chain Speed (Max.)	8 m/s
Bar Length	200 mm (8")
Chain Pitch	1/4"
Number of Chain Links	45
Groove Width	1.1 mm
Battery (not included)	Li-Ion, 20 V
Weight	1,4 kg
Code	0 74 117 01

Set
- Bar
- Chain
- Safety hood

BRUSHLESS

20v Lithium-Ion UNi ONE

GARDEN

Cordless drill-driver

CBL16-2Li

Features

- Brushless motor
- All-metal keyless chuck 13 mm
- Compact design allows use in confined spaces
- Automatic spindle lock
- Two speed low noise transmission
- Clutch torque limit adjustment
- Built-in illumination of the work area
- Reverse
- Speed adjustment by pressing the start switch
- Ergonomic handle with rubber provides perfect grip over
- Compact 2 Ah Li-Ion battery
- Charge level indicator

Voltage	16 V
No load speed	0-400/0-1400/min.
Chuck/holder	Keyless, 13 mm
Torque (hard/soft)	45/30 Nm
Torque adjustment steps	20 + 1
Battery	Li-Ion, 16 V, 2 Ah
Weight	1 kg
Code	0 71 260 01

Set

- Li-Ion Battery 2 Ah, 2 pcs.
- Charger
- Plastic carry case

2 Ah BRUSHLESS

HD PROFESSIONAL

Cordless chain saw

CP115

Features

- Brushless motor
- Suitable for trimming trees
- Accidental start protection
- Removable protective cover
- Ergonomic handle with rubber provides perfect grip over
- Compact 2 Ah Li-Ion battery
- Charge level indicator

Voltage	16 V
No load speed	4600/min.
Chain speed (max.)	6,7 m/s
Bar length	100 mm
Chain pitch	1/4"
Number of chain links	28
Battery	Li-Ion, 16 V, 2 Ah
Weight	1,2 kg
Code	0 74 106 01

Set

- Li-Ion Battery 2 Ah, 2 pcs.
- Charger
- Bar
- Chain
- Safety hood

2 Ah BRUSHLESS

HD PROFESSIONAL

Cordless drill-driver

CBL12Li

Features

- Brushless motor
- Single sleeve chuck 10 mm
- Compact design allows use in confined spaces
- Automatic spindle lock
- Two speed low noise transmission
- Clutch torque limit adjustment
- Built-in illumination of the work area
- Reverse
- Speed adjustment by pressing the start switch
- Ergonomic handle with rubber provides perfect grip over
- Compact 2 Ah Li-Ion battery
- Charge level indicator

Voltage	12 V
No load speed	0-400/0-1400/min.
Chuck/holder	Keyless, 10 mm
Torque (hard/soft)	38/24 Nm
Torque adjustment steps	20 + 1
Battery	Li-Ion, 12 V, 2 Ah
Weight	1 kg
Code	0 71 263 01

BRUSHLESS

PROFESSIONAL 2 Ah

Set
- Li-Ion Battery 2 Ah, 1 pcs.
- Charger

Cordless angle grinder

SH115E

Features

- Brushless motor
- Compact design for working in limited spaces
- The ergonomic rubberized handle ensures a perfect grip
- Compact 2 Ah lithium-ion battery
- Spindle lock function

Voltage	12 V
No load speed	20000 /min.
Spindle thread	M10
Blade size	75-76 mm
Battery	Li-Ion, 12 V, 2 Ah
Charging time	60 min.
Weight	0,65 kg
Code	0 74 107 01

BRUSHLESS

PROFESSIONAL 2 Ah

Set
- Li-Ion Battery 2 Ah, 1 pcs.
- Charger
- Cutting blade, 3 pcs.

Impact drill

DP950

DP950	
Voltage	220-240 V~
Input power	950 W
No load speed	0-3000/min.
Chuck/holder	key, 13 mm
Drilling capacity max.	
- wood	25 mm
- steel	10 mm
- concrete	13 mm
Weight	2,4 kg
Code	0 21 427 01

Set
- Auxilliary handle
- Depth gauge
- Plastic case

PROFESSIONAL

Rotary hammer SDS-max

MPR70

Voltage	220-240 V~
Input power	1200 W
No load speed	300-600/min.
Max. Impact rate	3500/min.
Impact energy	10 J
Holder type	SDS-max
Drilling capacity	
- drill bit	42 mm
- core bit	85 mm
Weight	7,1 kg
Code	0 11 702 01

Set
- Auxilliary handle
- Depth gauge
- Drill bit
- Plastic carry case

HD PROFESSIONAL

Brushless rotary hammer SDS+

MPR50BL

GYRO STOP

*Activates and shuts off the motor when jamming is detected, i.e., a sudden change in the drill's position relative to the drilling axis

Voltage	220-240 V~
Input power	1260 W
No load speed	1100/min.
Impact rate	5300/min.
Impact energy	7 J
Drilling capacity	
- drill bit	32 mm
- core bit	90 mm
Cable length	4 m
Weight	5,8 kg
Order code	0 12 814 01

Set

- Plastic case
- Wrench

BRUSHLESS

HD PROFESSIONAL

Rotary hammer SDS+

MPR26

Voltage	220-240 V~
Input power	800 W
No load speed	0-1350/min.
Impact rate (max.)	5300/min.
Impact energy	3 J
Drilling capacity	
- drill bit	26 mm
- core bit	68 mm
Cable length	3 m
Weight	2,8 kg
Order code	0 12 813 01

Set

- Plastic case
- Drill bit set (6, 8, and 10 mm)
- Pick
- Chisel
- Additional handle
- Drilling depth gauge
- Spare brush set

PROFESSIONAL

Brushless angle grinder

SA230BL

Voltage	220-240 V~
Power	2800 W
Rotation Speed	6500/min.
Spindle Thread	M14
Disc Diameter	230 mm
Weight	5,75 kg
Cable Length	4 m
Code	0 30 532 01

BRUSHLESS

HD PROFESSIONAL

Set

- Front handle
- Wrench
- Protective cover

Brushless angle grinder

SA125BLE

Voltage	220-240 V~
Power	1300 W
Rotation Speed	2880-11000/min.
Spindle Thread	M14
Disc Diameter	125 mm
Weight	1,3 kg
Cable Length	3 m
Code	0 30 530 01

BRUSHLESS

HD PROFESSIONAL

Set

- Front handle
- Wrench
- Protective cover

Angle grinder

SH1251CSE

Voltage	220-240 V~
Power	1500 W
Rotation Speed	4000-11000/min.
Spindle Thread	M14
Disc Diameter	125 mm
Weight	2,7 kg
Cable Length	3 m
Code	0 30 531 01

Set

- Front handle
- key
- protective cover

HD PROFESSIONAL

Angle grinder

SH1252SE

Voltage	220-240 V~
Power	1200 W
Rotation Speed	4000-11000/min.
Spindle Thread	M14
Disc Diameter	125 mm
Weight	2,7 kg
Cable Length	3 m
Code	0 30 533 01

Set

- Front handle
- key
- protective cover

PROFESSIONAL

Orbital sander

XS3-125ET

Voltage	220-240 V~
Input power	450 W
No load speed	4000-13500/min.
Orbit	5 mm
Pad size	Ø125 mm
Weight	2,1 kg
Code	0 36 108 01

Set

- Dust collector
- Sheet of sandpaper

PROFESSIONAL

Multi-purpose sander

XS2-125

90x187 mm

Ø125 mm

30x90 mm

Voltage	220-240 V~
Input power	220 W
No load speed	14000-24000/min.
Orbit	1,8 mm
Weight	1,4 kg
Code	0 36 107 01

Set

- Sanding pads, 4 pcs
- Dust container, 1 pcs
- Sandpaper

PROFESSIONAL

Jig saw

JS801

Voltage	220-240 V~
Power	750 W
Stroke Rate	0-3000/min.
Max. Cutting Depth	
- Wood	120 mm
- Steel	8 mm
Stroke Length	26 mm
Weight	2,9 kg
Code	0 41 912 01

Set

- Parallel fence
- Key
- Vacuum cleaner connection
- Plastic soleplate
- Anti-splinter plate

PROFESSIONAL

Router

RH1400CE

Voltage	220-240 V~
Power	1400 W
Rotation speed	12000-28000/min.
Cutter shank diameter	Ø8, Ø12 mm
Milling depth	55 mm
Weight	3,6 kg
Order code	0 51 513 01

Set

- Rip fence
- Dust extraction nozzle
- 12 mm collet
- 8 mm bushing
- Copying bushing
- Wrench

PROFESSIONAL

Trimmer

RH751

Features

- Soft start
- Electronic speed control with LCD display
- Maintains constant speed under load
- Spindle lock for quick cutter changes
- Routing depth adjustment
- Removable cast aluminum alloy base
- Safety switch with lock-on function
- Usable with plunge or tilt base
- Rip fence and roller fence included
- Dust extraction pipe included
- Removable brush covers

Voltage	220-240 V~
Power	750 W
Rotation speed	13000-33000/min.
Cutter shank diameter	Ø6, Ø8 mm
Weight	1,9 kg
Code	0 51 512 01

Set

- Rip fence
- Roller fence
- Dust extraction port
- 6 mm collet
- 8 mm collet
- Additional detachable handles
- Wrench

PROFESSIONAL

Additional bases *for trimmers RH750BL and RH751*

Plunge base

Code	0 52 605 01

Tilt base

Code	0 52 606 01

Notes

Electric tools STATUS comply with the current directives and harmonized standards of the European Union.

STATUS Italia s.r.l.
Via Aldo Moro, Nr. 14/A
IT36060 - Pianezze
Zona industriale, (VI), ITALY
e-mail: office@status-tools.eu
sales@status-tools.com

STATUS Italia s.r.l. reserves the right to introduce changes in the technical specifications and packaging of the products for the purpose of product improvement and optimization.

STATUS®

STATUS Italia s.r.l.
Via Aldo Moro, Nr. 14/A
IT36060 - Pianezze
Zona industriale, (VI), ITALY
e-mail: office@status-tools.eu
sales@status-tools.com